




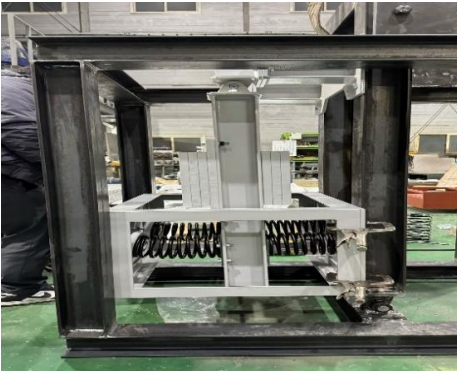






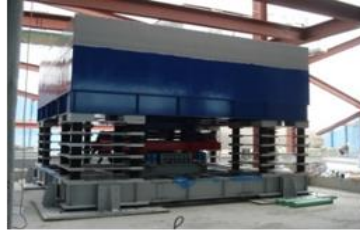

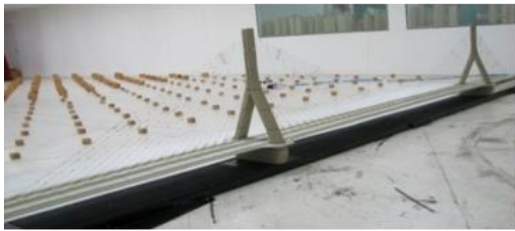












TRACK RECORD OF VIBRATION CONTROL DEVICE







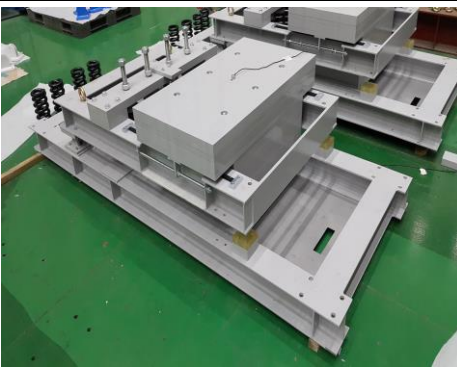




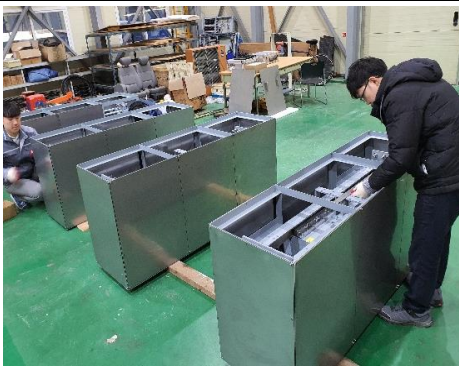

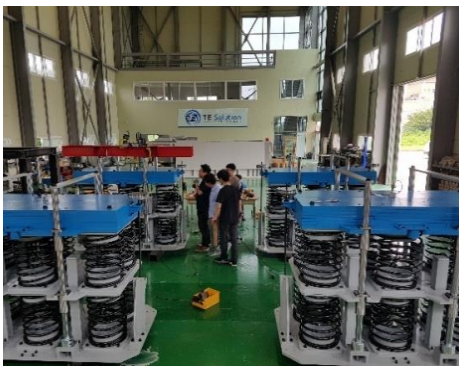
No.	Project	Vibration Control Device	
71	 <p>Chuncheon Toegyedong</p> <ul style="list-style-type: none"> ▪ Client: Chuncheon City Office ▪ Outline - Office Building - Length: 83.4m - Frequency: 1.932Hz(Ver) ▪ Year: In Progress 		<ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (2 sets) ▪ Control direction: Vertical ▪ Specification - Moving Mass: 2ton - Stroke: 3cm ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
70	 <p>Seohaesun Construction Zone #5 Arch Bridge</p> <ul style="list-style-type: none"> ▪ Client: DL E&C Co.,LTD ▪ Outline - Bridge steel box hanger - Length: 155m - Frequency: 3.182~5.233 Hz(Long.) ▪ Year: In Progress 		<ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (18 sets) ▪ Control direction: Horizontal ▪ Specification - Moving Mass: 0.25ton - Stroke: 5cm ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
69	 <p>Pohang Poeungyo</p> <ul style="list-style-type: none"> ▪ Client: Daeyoung Engineering & Steel Industries Co.,LTD ▪ Outline - Footbridge - Length: 126.5m - Frequency: 3.592Hz, 3.16Hz ▪ Year: 2023 		<ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (2 sets) ▪ Control direction: Vertical ▪ Specification - Moving Mass: 1ton - Stroke: 4cm ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /







No.	Project		Vibration Control Device	
68		<p>Yeosu Ando Port Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Kukmin Industrial Co.,Ltd. ▪ Outline - Bridge - Length: 140m - Frequency: 1.723Hz(1st mode), 2.443Hz(2nd mode) ▪ Year: 2023 		<ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (4 sets) ▪ Control direction: Vertical ▪ Specification - Moving Mass: 0.6ton - Stroke: 4cm ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
67		<p>Yeosu Dolsan Daegyong</p> <ul style="list-style-type: none"> ▪ Client: Wookyung Construction Co., Ltd. ▪ Outline - Bridge - Length: 449.6m - Frequency: 0.532Hz(Ver) ▪ Year: In Progress 		<ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (4 sets) ▪ Control direction: Vertical ▪ Specification - Moving Mass: 3ton - Stroke: 19cm + 5cm(buffer) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
66		<p>Yangsan Jungbudong</p> <ul style="list-style-type: none"> ▪ Client: Kumho E&C Co., Ltd. ▪ Outline - Residence Building - Height: 144.2m - Frequency: 0.210Hz(Y), 0.296Hz(X) ▪ Year: In Progress 		<ul style="list-style-type: none"> ▪ Type: Pendulum Type TMD (1 set) ▪ Control direction: Y direction ▪ Specification - Moving Mass: 130ton - Stroke: 30cm + 8cm(buffer) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /





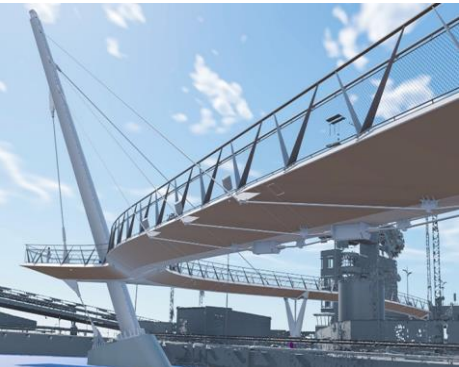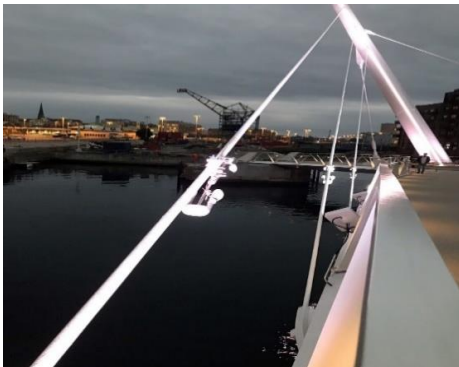

No.	Project	Vibration Control Device
65	 <p>Jeju Airport</p> <ul style="list-style-type: none"> ▪ Client: Jeju Regional Office of Aviation ▪ Outline <ul style="list-style-type: none"> - Air Traffic Control Tower - Height: 58.6m - Frequency: 0.763Hz(X), 0.929Hz(Y) ▪ Year: In Progress 	 <ul style="list-style-type: none"> ▪ Type: Active Mass damper (2 sets) ▪ Control direction: X & Y direction ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 9.0ton(X), 7.5ton(Y) - Stroke: 12cm(X) ,8cm(Y) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
64	 <p>Bangkapi Flyover Bridge, Thailand</p> <ul style="list-style-type: none"> ▪ Client: IETL Co.,LTD ▪ Outline <ul style="list-style-type: none"> - Bridge - Length: Max. 43(m) - Frequency: 2.6Hz ▪ Year: In Progress 	 <ul style="list-style-type: none"> ▪ Type: TMD (4 sets) ▪ Control direction: Vertical ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 2ton (vertical 4 sets) - Stroke: 5.0cm(vert) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
63	 <p>Daegu Bonridong</p> <ul style="list-style-type: none"> ▪ Client: Taewang E&C Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Residence Building - Height: 132.3m - Frequency: 0.256Hz(X), 0.301Hz(Y) ▪ Year: In Progress 	 <ul style="list-style-type: none"> ▪ Type: Pendulum Type TMD (1 set) ▪ Control direction: X & Y direction ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 100ton - Stroke: 25cm + 15cm(buffer) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /



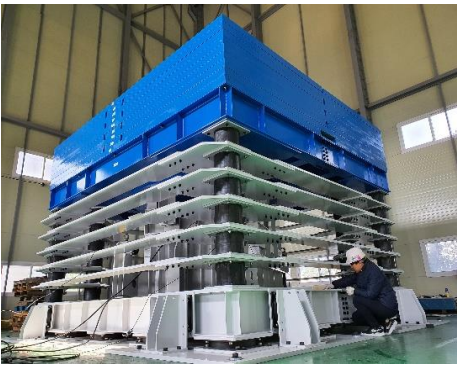

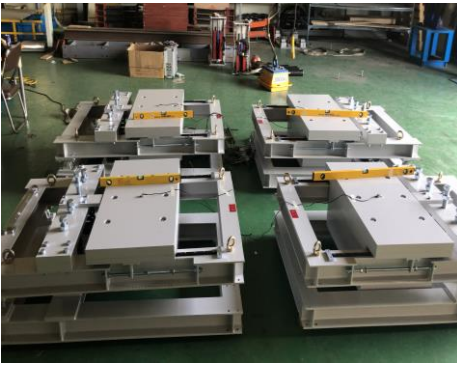
No.	Project		Vibration Control Device	
62		<p>Fubon Life A25 Tower, Taiwan</p> <ul style="list-style-type: none"> ▪ Client: ARDEN Engineering Consultant ▪ Outline <ul style="list-style-type: none"> - Height: 256.65m - Frequency <ul style="list-style-type: none"> 0.2209Hz(x-dir) 0.2210Hz(y-dir) ▪ Year: 2022 		<ul style="list-style-type: none"> ▪ Type: Pendulum type TMD (1 set) ▪ Control direction: Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 500ton - Stroke: 0.7m(xdir) 0.7m(y-dir) - Optimal damping Ratio: 7.76~31.4% ▪ Conceptual & Detailed Design / / Manufacture / Installation Supervision / / Performance test /
61		<p>Sejong Geumgang(Riv.) Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Lotte Construction Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Arch + Truss - Length: 113m + 113m - Frequency: 2.853Hz(Z), 1.276(X), 2.324Hz(Z) ▪ Year: 2021 		<ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (7 sets) ▪ Control direction: Horizontal, Vertical ▪ Specification <ul style="list-style-type: none"> - Moving Mass: <ul style="list-style-type: none"> 2.0ton (vertical 6 sets) +2.0ton (Horizontal 1set) - Stroke: 2.1cm(vert) + 0.8cm(Hor.) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
60		<p>2020 Dubai Expo Korean Pavilion, UAE</p> <ul style="list-style-type: none"> ▪ Client: KOTRA + Ssangyong E&C Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - 4 Truss Ramps(cantilever type) - Length: Max. 92(m) - Frequency: 1.684(Z), 2.132(Z), 2.681(Z) ▪ Year: 2021 		<ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (5 sets) ▪ Control direction: Vertical ▪ Specification <ul style="list-style-type: none"> - Moving Mass: <ul style="list-style-type: none"> 0.3ton (vertical 5 sets) - Stroke: 3.0cm(vert) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /




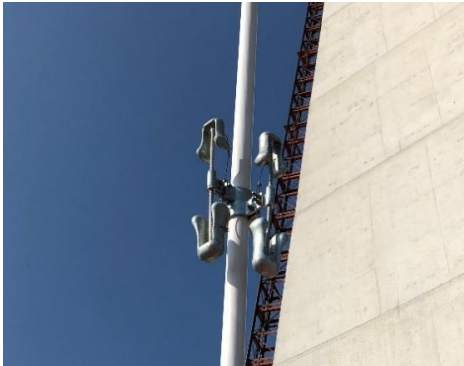


No.	Project		Vibration Control Device	
59		<p>Incheon International Airport ATC Tower</p> <ul style="list-style-type: none"> ▪ Client: Incheon International Airport Co. ▪ Outline - Air Traffic Control Tower - Height: 65m - Frequency: 0.844Hz(X), 0.833Hz(Y) ▪ Year: 2020 		<ul style="list-style-type: none"> ▪ Type: Active Mass damper (2 sets) ▪ Control direction: X & Y direction ▪ Specification - Moving Mass: 1.3ton - Stroke: 15cm(X) +12cm(Y) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
58		<p>AICHI Stack, Japan</p> <ul style="list-style-type: none"> ▪ Client: Nichizo Tech Inc. ▪ Outline - Stack - Height: 45m - Frequency: 1.31Hz(X & Y) ▪ Year: 2021 		<ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (4 sets) ▪ Control direction: Horizontal bi-dir. ▪ Specification - Moving Mass: 180kg (X & Y) - Stroke: 13.5cm(X & Y) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
57		<p>Seohee Star Hills</p> <ul style="list-style-type: none"> ▪ Client: SeoHee E&C Co., Ltd. ▪ Outline - Residence Building - Height: 110m - Frequency: 0.314Hz(X), 0.307Hz(Y) ▪ Year: 2022 		<ul style="list-style-type: none"> ▪ Type: Pendulum Type TMD (1 set) ▪ Control direction: 1-direction(Y) ▪ Specification - Moving Mass: 60ton - Stroke: 20cm +10cm(buffer) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /





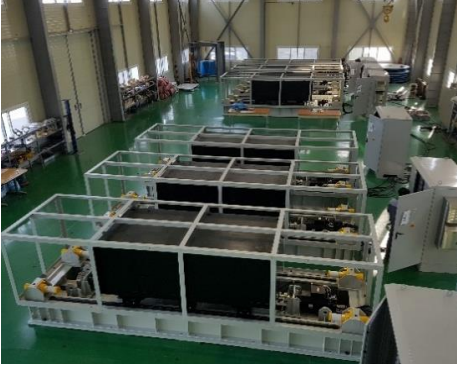

No.	Project	Vibration Control Device
56	 <p>Jincheon Mt. Duta Observatory</p> <ul style="list-style-type: none"> ▪ Client: Jincheon County Office ▪ Outline - Ramp type tower - Height: 14.5m - Frequency: 1.719(Y), 1.83(Z-rot), 2.192Hz(X) ▪ Year: 2020 	 <ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (4 sets) ▪ Control direction: Horizontal ▪ Specification - Moving Mass: <ul style="list-style-type: none"> 0.3ton (Horizontal 2 sets) 0.3ton (Torsional 2sets) - Stroke: 2.5cm(Hor.), 2.0cm(Tor.) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
55	 <p>KOBE Steel Stack, Japan</p> <ul style="list-style-type: none"> ▪ Client: Nichizo Tech(Japan) ▪ Outline - Steel Stack - Height: 90m - Frequency: 0.57Hz ▪ Year: 2020 	 <ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (4 sets) ▪ Control direction: 1-direction ▪ Specification - Moving Mass: 0.76ton - Stroke: 20cm - Magnetic damper ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
54	 <p>Cheonsa(1004) Bridge</p> <ul style="list-style-type: none"> ▪ Client: Daewoo E&C Co., Ltd. ▪ Outline - Cable-Stayed bridge - Length: 1,004m (307+510+187) - Frequency: 0.32Hz ▪ Year: 2020 	 <ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (4 sets) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 3.5ton - Stroke: 19cm(vert) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /


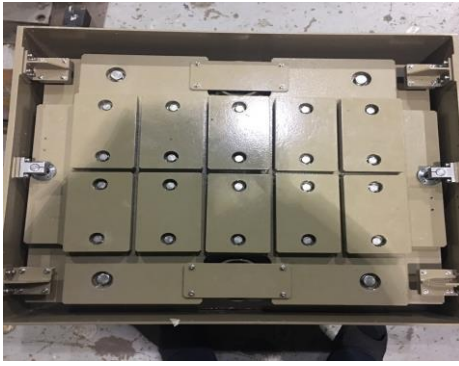

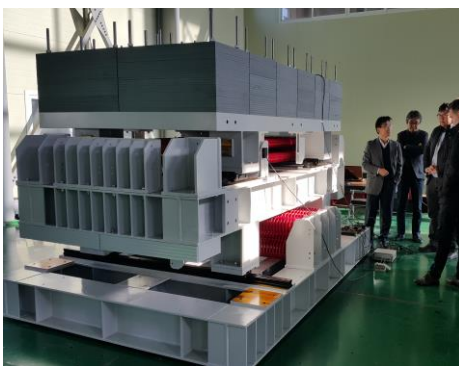


No.	Project	Vibration Control Device
53	 <p>Gagok 2nd Bridge</p> <ul style="list-style-type: none"> ▪ Client: Hyundai Engineering Co., Ltd. ▪ Outline - 3-span Preflex Girder bridge - Length: 40m - Frequency: 1.92Hz ▪ Year: 2019 	 <ul style="list-style-type: none"> ▪ Type: TMD (1 set) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 3ton - Stroke: 4cm(vert) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
52	 <p>Oceanpiren Bridge, Sweden</p> <ul style="list-style-type: none"> ▪ Client: PEAB ▪ Outline - Cable Stayed bridge - Length: 40m - Frequency: 5~30Hz ▪ Year: 2021 	 <ul style="list-style-type: none"> ▪ Type: Stockbridge Damper (Hanger Cable) ▪ Control direction: Horizontal dir. ▪ Specification - Moving Mass: 4.62kg +7.90 kg - Messenger Cable: Φ-16mm ▪ Achieved damping Ratio: 0.687% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
51	 <p>Halogaland Bridge, Norway</p> <ul style="list-style-type: none"> ▪ Client: Joint Venture Halogaland (SRBG) ▪ Outline - Suspension bridge (Handrope) - Main span length of 1,178m - Frequency: 5Hz ~ 30Hz ▪ Year: 2021 	 <ul style="list-style-type: none"> ▪ Type: Stockbridge Damper (Handrope) ▪ Control direction: Horizontal dir. ▪ Specification - Moving Mass: 2.78kg +4.46 kg - Messenger Cable: Φ-16mm ▪ Achieved damping Ratio: 0.687% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /

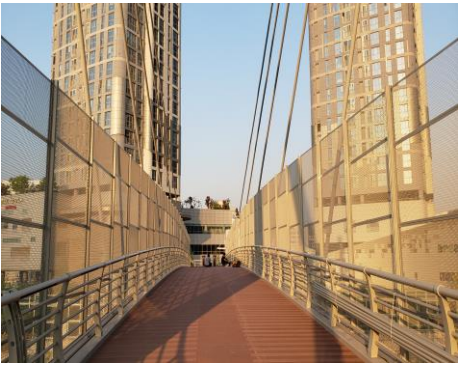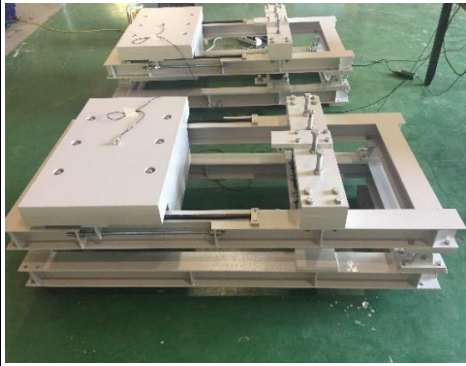





No.	Project	Vibration Control Device
50	 <p>Halogaland Bridge, Norway</p> <ul style="list-style-type: none"> ▪ Client: Joint Venture Halogaland (SRBG) ▪ Outline <ul style="list-style-type: none"> - Suspension bridge (Hanger cable) - Main span length of 1,178m - Frequency: 5~30Hz ▪ Year: 2021 	 <ul style="list-style-type: none"> ▪ Type: Stockbridge Damper (Hanger Cable) ▪ Control direction: Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 4.62kg +7.90 kg - Messenger Cable: Φ-16mm ▪ Achieved damping Ratio: 0.687% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
49	 <p>1915 Canakkale Bridge, Turkey</p> <ul style="list-style-type: none"> ▪ Client: DLSY JV ▪ Outline <ul style="list-style-type: none"> - Span Length: 3,536m (770+2,023+770) - Tower Height: 318m - Frequency 5Hz ~ 30Hz ▪ Year: 2019 	 <ul style="list-style-type: none"> ▪ Type: Stockbridge Damper (Handrope) ▪ Control direction: Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 2.78kg +7.46kg - Messenger Cable: Φ-16mm ▪ Achieved damping Ratio: 0.687% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
48	 <p>1915 Canakkale Bridge, Turkey</p> <ul style="list-style-type: none"> ▪ Client: DLSY JV ▪ Outline <ul style="list-style-type: none"> - Span Length: 3,536m (770+2,023+770) - Tower Height: 318m - Frequency 5Hz ~ 30Hz ▪ Year: 2019 	 <ul style="list-style-type: none"> ▪ Type: Stockbridge Damper (Hanger cable) ▪ Control direction: Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 4.62kg +7.90 kg - Messenger Cable: Φ-16mm ▪ Achieved damping Ratio: 0.687% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /


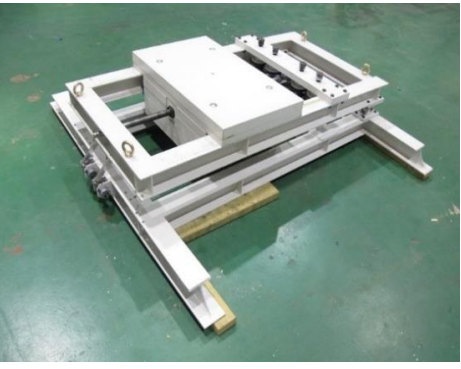

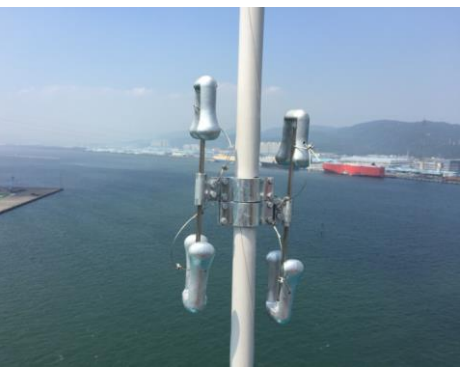


No.	Project	Vibration Control Device
47	 <p>1915 Canakkale Bridge, Turkey</p> <ul style="list-style-type: none"> ▪ Client: DLSY JV ▪ Outline <ul style="list-style-type: none"> - Span Length: 3,536m (770+2,023+770) - Tower Height: 318m - Frequency <ul style="list-style-type: none"> 0.08-0.63Hz(Long-dir) 0.52-0.70Hz(Torsion-dir) ▪ Year: 2019 	 <ul style="list-style-type: none"> ▪ Type: AMD (6 sets) ▪ Control direction: Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 30ton (6 sets) - Max. Stroke: 120cm - Installation location: Tower ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
46	 <p>Greenland Centre Sydney, Australia</p> <ul style="list-style-type: none"> ▪ Client: Probuild Construction ▪ Outline <ul style="list-style-type: none"> - Height: 235m - Frequency: 0.153Hz (x-dir), 0.170 (y-dir) ▪ Year: 2020 	 <ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (1 set) ▪ Control direction: Horizontal bi-dir. ▪ Specification <ul style="list-style-type: none"> - Rubber Bearing + Coil-Spring type - Moving Mass: 180tons - Stroke: ±336mm ▪ Conceptual & Detailed Design / / Manufacture / Performance test /
45	 <p>Masan west harbor Bridge</p> <ul style="list-style-type: none"> ▪ Client: Suhyun Engineering Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Suspension bridge - Length: 130m - Frequency: 0.804Hz ▪ Year: 2018 	 <ul style="list-style-type: none"> ▪ Type: Cantiliver Type TMD (4 sets) ▪ Control direction: Vertical ▪ Specification <ul style="list-style-type: none"> - Moving Mass: <ul style="list-style-type: none"> 1.2ton (2 sets)+1.0ton (2 sets) - Stroke: 3cm(vert) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /

No.	Project	Vibration Control Device
44	 <p>Haneda Bridge, Japan</p> <ul style="list-style-type: none"> ▪ Client: Hitachi Zosen Co., Ltd. ▪ Outline - Length: 594.7m (182+240+172.7) - Frequency 0.563Hz(ver-dir) ▪ Year: 2019 	 <ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (20 sets) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 3.5ton (20 sets) - Installation location: Steel box girder ▪ Conceptual & Detailed Design / / Manufacture / Installation Supervision / / Performance test /
43	 <p>2nd Namhae Bridge (Hanger Cable)</p> <ul style="list-style-type: none"> ▪ Client: GS E&C Co., Ltd. ▪ Outline - Suspension bridge - Length: 990m (50+890+50) - Cable Frequency: 1Hz ~ 40Hz - Damping ratio: 0.01%~0.03% ▪ Year: 2018 	 <ul style="list-style-type: none"> ▪ Type: Stockbridge Damper ▪ Control direction: Horizontal dir. ▪ Specification - Moving Mass: 4.62kg +7.90 kg - Messenger Cable: Φ-16mm ▪ Achieved damping Ratio: 0.687% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
42	 <p>Choansan Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Hanyang Industry Co., Ltd. ▪ Outline - Arch Bridge - Length: 191m (45+80+40+30) - Frequency 1.594Hz(1st Ver-dir), 1.845Hz(2nd Ver-dir) - Damping ratio: 0.51% ▪ Year: 2017 	 <ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (4 sets) ▪ Control direction: Vertical ▪ Specification - Moving Mass: 1.5ton (2 sets)+0.4ton (2 sets) - Stroke: 3cm(vert) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /

No.	Project	Vibration Control Device
41	 <p>Wangsibri Haengdang Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Samil E&C Co., Ltd. ▪ Outline - Cable Stayed Bridge - Length: 78m - Frequency 1.482Hz(Ver-dir) - Damping ratio: 0.346% ▪ Year: 2017 	 <ul style="list-style-type: none"> ▪ Type: TMD (2 sets) ▪ Control direction: Vertical ▪ Specification - Moving Mass: 0.7ton x2(vert) - Stroke: 5cm(vert) ▪ Achieved damping Ratio: 5.134% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
40	 <p>Incheon International Airport Main Tower</p> <ul style="list-style-type: none"> ▪ Client: Sungji E&C Co., Ltd. ▪ Outline - Airtraffic control tower - Height: 100.4m - Frequency: 0.71Hz(X), 0.74Hz(Y) - Damping ratio: 0.6% ▪ Year: 2017 	 <ul style="list-style-type: none"> ▪ Type: HMD (2 sets) ▪ Control direction: Horizontal bi-dir. ▪ Specification - Moving Mass: 6.78ton(X), 9.23ton(Y) - Stroke: ±350mm - Optimal damping ratio: 15.0% ▪ Achieved damping Ratio: 13.24%(X), 13.65%(Y) ▪ Replacement of Control unit / / Performance test /
39	 <p>Pyeongtaek (Cable Stayed) Bridge</p> <ul style="list-style-type: none"> ▪ Client: SK E&C Co., Ltd. ▪ Outline - Extradosed bridge - Length: 1210m (7 Pylons) - Cable Frequency: 2Hz ~ 10Hz - Damping ratio: 0.04%~0.06% ▪ Year: 2017 	 <ul style="list-style-type: none"> ▪ Type: Stockbridge Damper ▪ Control direction: Vertical dir. ▪ Specification - High-frequency & Low-frequency Combined Type - Messenger Cable: Φ-19mm ▪ Achieved damping Ratio: 0.316% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /






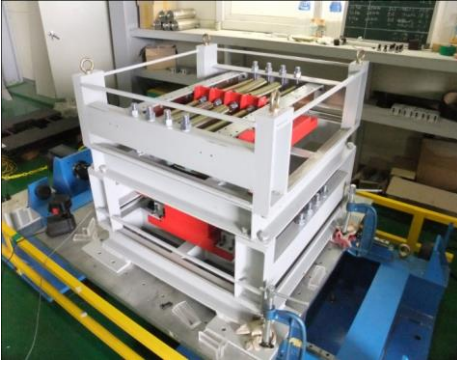
No.	Project	Vibration Control Device
38	 <p>Gonjiam Hwadam Forest Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Serve One Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Arch Bridge - Length: 59m - Frequency <ul style="list-style-type: none"> 2.28Hz(Hor-dir) 8.20Hz(Ver-dir) ▪ Year: 2017 	 <ul style="list-style-type: none"> ▪ Type: TMD (3 sets) ▪ Control direction: Vertical, Horizontal ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 0.4ton x2(hor), 0.3t(ver) - Stroke: 0.587cm/0.779cm(hor), 0.1m(ver) ▪ Achieved damping ratio: 8.176%(Hor.), 5.84%(ver.) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
37	 <p>New York Wheel, USA</p> <ul style="list-style-type: none"> ▪ Client: Mammoet-Starneth LLC. ▪ Outline <ul style="list-style-type: none"> - Height: 192m - Frequency <ul style="list-style-type: none"> 0.737Hz(x-dir) 0.278Hz(y-dir) ▪ Year: 2016 	 <ul style="list-style-type: none"> ▪ Type: Brace TMD (2ea) ▪ Control direction: Horizontal bi-dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 32ton & 28ton - Stroke: 50mm(xdir) 270mm(y-dir) - Optimal damping Ratio: 6% ▪ Conceptual & Detailed Design / / Manufacture / Installation supervision / / Performance test /
36	 <p>Taichung Bauger Building, Taiwan</p> <ul style="list-style-type: none"> ▪ Client: CEC (Continental Engineering Corporation) ▪ Outline <ul style="list-style-type: none"> - Height: 158.4m - Frequency <ul style="list-style-type: none"> 0.237Hz(x-dir) 0.230Hz(y-dir) ▪ Year: 2018 	 <ul style="list-style-type: none"> ▪ Type: Pendulum Type TMD (1 set) ▪ Control direction: Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 150ton - Stroke: 0.6m(xdir) 1.35m(y-dir) - Optimal damping Ratio: 12.3% ▪ Conceptual & Detailed Design / / Manufacture / Installation Supervision / / Performance test /


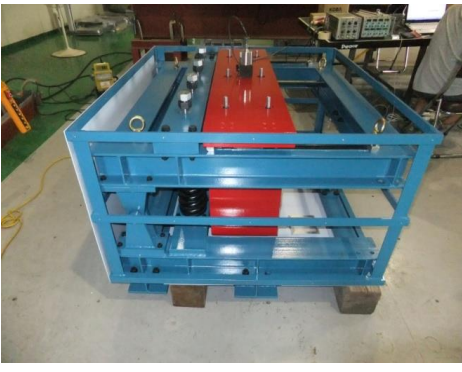




No.	Project	Vibration Control Device
35	 <p>Incheon International Airport 2nd Tower</p> <ul style="list-style-type: none"> ▪ Client : Dongyang E&C Co., Ltd. ▪ Outline - Steel & concrete - Height: 93.90m - Frequency: 0.9560Hz (y-dir) 1.0231Hz (x-dir) - Damping Ratio: 0.6% ▪ Year: 2017 	 <ul style="list-style-type: none"> ▪ Type : AMD (2 sets) ▪ Control direction : Horizontal bi-dir. ▪ Specification - Moving Mass: 10.4ton(x), 9.2ton(y) (2sets) - Stroke: ±70mm - Optimal damping ratio: 8.39%(x), 9.89%(y) ▪ Achieved damping ratio: 8.19%(x), 6.66%(y) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
34	 <p>DUBAI I Ferris Wheel, UAE</p> <ul style="list-style-type: none"> ▪ Client : Hyundai E&C Co., Ltd. ▪ Outline - 4 leg column+Wheel - Height: 258m - Diameter of wheel: 250m - World's Highest Ferris Wheel ▪ Year: 2021 	 <ul style="list-style-type: none"> ▪ Type : LEG TMD (4ea), Brace TMD(2ea) ▪ Control direction : Horizontal dir.(X&Y) ▪ Specification - Moving Mass: 4ton(4ea) & 45ton(2ea) - Installation location: Leg - Optimal damping ratio: 10% - Stroke: 250mm (45ton) / 300mm(4ton) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
33	 <p>Palyung Bridge (Hanger Cable)</p> <ul style="list-style-type: none"> ▪ Client: Daelim Industries Co., Ltd. ▪ Outline - Suspension bridge - Length: 1340m (310+850+180) - Cable Frequency: 1Hz ~ 40Hz - Damping ratio: 0.01%~0.03% ▪ Year: 2016 	 <ul style="list-style-type: none"> ▪ Type: Stockbridge Damper ▪ Control direction: Horizontal dir. ▪ Specification - Moving Mass: 4.62kg +7.90 kg - Messenger Cable: Φ-16mm ▪ Achieved damping Ratio: 0.695% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /







No.	Project		Vibration Control Device	
32		<p>Cheonan Cheongsoo Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Heunglim Construction Co., Ltd. ▪ Outline - Cable Stayed bridge - Length: 38.15m - Frequency: 1.9296Hz (V) - Damping ratio: 0.44% ▪ Year: 2015 		<ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (1 set) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 0.75ton(1 set) - Stroke: ±13mm - Optimal damping ratio: 6.7% ▪ Achieved damping Ratio: 6.403% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
31		<p>Ulsan Bridge (Hanger Cable)</p> <ul style="list-style-type: none"> ▪ Client: Hyundai E&C Co., Ltd. ▪ Outline - Suspension Bridge - Length: 1,800m - Cable Frequency: 1Hz ~ 40Hz - Damping ratio: 0.016%~0.04% ▪ Year: 2015 		<ul style="list-style-type: none"> ▪ Type: Stockbridge damper (120 sets) ▪ Control direction: Horizontal dir. ▪ Specification - Moving Mass: 4.62kg +7.90 kg - Messenger Cable: Φ-16mm ▪ Achieved damping Ratio: 0.35% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
30		<p>Sejong Government Office Footbridge</p> <ul style="list-style-type: none"> ▪ Client: OK Consultant ▪ Outline - Single span+2span bridge - Length: 163m - Frequency: 2.07Hz - Damping Ratio: 0.92% ▪ Year: 2014 		<ul style="list-style-type: none"> ▪ Type: TMD (3 sets) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 1.0ton (3 sets) - Installation location: Under the deck ▪ Achieved damping Ratio: 2.12% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /




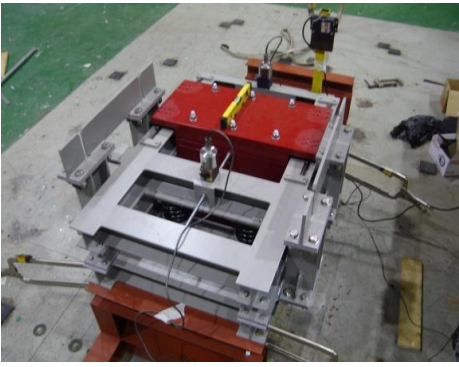

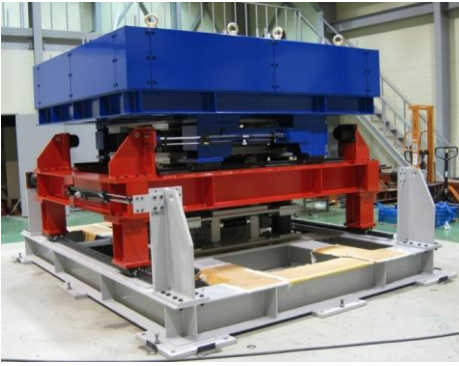
No.	Project		Vibration Control Device	
29		<p>Daehalang Kkochgelang Footbridge</p> <ul style="list-style-type: none"> ▪ Client : Hyundai Steel Co., Ltd ▪ Outline - Cable Stayed bridge - Length: 260m - Frequency: 1.9296Hz (V) - Damping Ratio: 0.28% ▪ Year : 2013 		<ul style="list-style-type: none"> ▪ Type : TMD (4 sets) ▪ Control direction : Vertical dir. ▪ Specification - moving Mass: 1.5ton(2ea), 0.6ton(2ea) - Stroke: ±28mm - optimal damping Ratio: 6.8% ▪ Achieved damping Ratio: 5.4% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
28		<p>Gangneung Dano Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Gangneung City Office ▪ Outline - 3-span steel Bridge - Length: 108m - Frequency: 2.01Hz (1st V), 3.07Hz (2nd V) - Damping ratio: 0.47%(1st), 0.77%(2nd) ▪ Year: 2013 		<ul style="list-style-type: none"> ▪ Type : TMD (3 sets) ▪ Control direction : Vertical dir. ▪ Specification - Moving Mass: 1.6ton (1ea), 0.3ton (2ea) - Stroke: ±30mm ▪ Achieved damping ratio 9.7%(1st V), 9.3%(2nd V) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
27		<p>Lashing Bridge on Maersk Ship</p> <ul style="list-style-type: none"> ▪ Client : DSME ▪ Outline - Lashing Bridge - Hight: 8.5m - Frequency: 6.0~8.0Hz - Damping ratio: 0.2% ▪ Year: 2013 		<ul style="list-style-type: none"> ▪ Type : TMD (2 sets) ▪ Control direction : Horizontal dir. ▪ Specification - Moving Mass: 0.2ton (2 sets) - Stroke: ±15mm - Optimal damping Ratio: 8.96% ▪ Achieved damping ratio: 6.81% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /




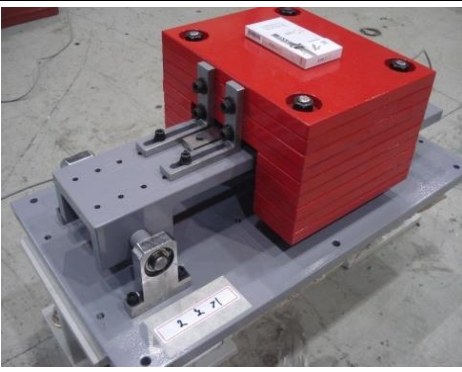

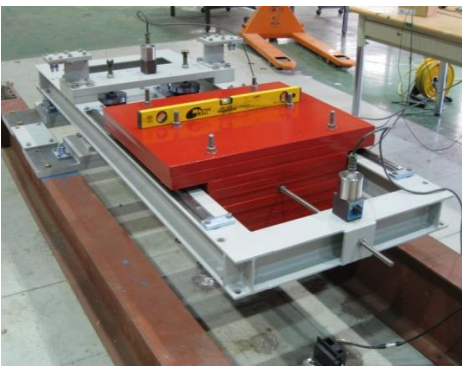
No.	Project	Vibration Control Device
26	 <p>Gang-byun Techno Mart</p> <ul style="list-style-type: none"> ▪ Client: Prime Development Co., Ltd ▪ Outline <ul style="list-style-type: none"> - Shoping Mall & Office - Height: 187m(39-stories) - Frequency: 0.19Hz(Y-Dir.), 2.7Hz(Z-Dir.) - Damping ratio: 1.0% (Y-dir.), 0.3% (Z-dir.) ▪ Year : 2013 	 <ul style="list-style-type: none"> ▪ Type: HMD (AMD+TMD, 1 set) ▪ Control direction: Ver. & Hor. dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: V.40t(TMD), H.50t(AMD) - Stroke: $\pm 10\text{mm}$(TMD), $\pm 600\text{mm}$(AMD) - Optimal damping ratio: 4.63%(TMD) ▪ Achieved damping ratio: 6.7%(x), 6.7%(z) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
25	 <p>Songdo 4th Bridge, Tower during Construction & In-service</p> <ul style="list-style-type: none"> ▪ Client : GS E&C Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Cable stayed bridge - Height: 105.2m - Frequency: 0.351Hz~0.645Hz (During Construction) - Damping ratio: 0.4% ▪ Year: 2013 	 <ul style="list-style-type: none"> ▪ Type: TMD (2 sets) ▪ Control direction : Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 6.0 ton (2 sets) - Stroke: $\pm 460\text{mm}$ - Optimal damping Ratio: 7.3% ~ 8.3% ▪ Achieved damping ratio: 5.76% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
24	 <p>2nd Jindo Bridge (In-Service Stage)</p> <ul style="list-style-type: none"> ▪ Client: Hyundai E&C Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Cable stayed bridge - Length: 484m - Frequency: 0.438Hz ▪ Year: 2012 	 <ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (4 sets) ▪ Control direction: Vertical dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 3.25ton (4 sets) - Installation location: Steel box girder ▪ Achieved damping ratio: 5.75% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /


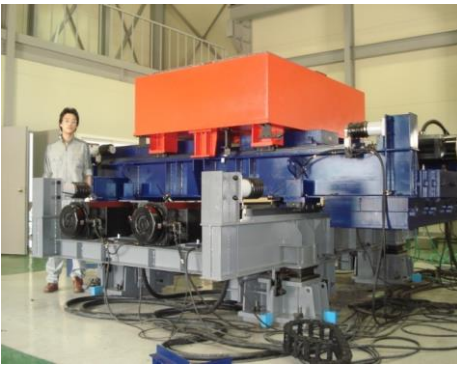




No.	Project		Vibration Control Device	
23		<p>Paju Lotte Premium Outlets Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Lotte Shopping ▪ Outline <ul style="list-style-type: none"> - 2-span steel bridge - Length: 93m - Frequency: 1.78Hz (V) - Damping ratio: 0.76% ▪ Year: 2012 		<ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (4 sets) ▪ Control direction: Vertical dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 0.75ton (4 sets) - Stroke: ±30mm - Optimal damping ratio: 6.0% ▪ Achieved damping ratio: 8.6% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
22		<p>BEXCO Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Seung Hwa Plant ▪ Outline <ul style="list-style-type: none"> - Cable stayed bridge - Length: 82m - Frequency: 1.60Hz (V) - Damping ratio: 0.7% ▪ Year: 2012 		<ul style="list-style-type: none"> ▪ Type : Cantilever Type TMD (2 sets) ▪ Control direction : Vertical dir. ▪ Specification <ul style="list-style-type: none"> - moving Mass: 1.3ton (2 sets) - Stroke: ±100mm - optimal damping Ratio: 3.6% ▪ Achieved damping ratio: 3.05% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
21		<p>Ube Steel Stack, Japan</p> <ul style="list-style-type: none"> ▪ Client: Hitachi Zosen Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Steel chimney - Height: 50m - Frequency: 1.567Hz(X,Y) - Damping ratio: 1.27%(X), 1.02%(Y) ▪ Year: 2011 		<ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (2 sets) ▪ Control direction: Horizontal bi-dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 0.24ton (2 sets) - Stroke: ±95mm - Optimal damping ratio: 10.8% ▪ Achieved damping ratio: 3.799%(X), 3.336%(Y) ▪ Conceptual & Detailed Design / / Manufacture / Installation Supervision / / Performance test /

No.	Project	Vibration Control Device
20	 <p>Ulleungdo Footbridge</p> <ul style="list-style-type: none"> ▪ Client: New-millennium E&C Co., Ltd. ▪ Outline - Suspension bridge - Length: 140m - Frequency: 1.80Hz(V) - Damping ratio: 0.4% ▪ Year: 2011 	 <ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (2 sets) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 1.2ton (2 sets) - Stroke: ±30mm - Optimal damping ratio: 14.2% ▪ Achieved damping ratio: 8.69% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
19	 <p>Dongchon Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Cheonggu E&C Co., Ltd. ▪ Outline - Cable stayed bridge - Length: 222m - Frequency: 1.63Hz (V) - Damping ratio: 0.4% ▪ Year: 2011 	 <ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (6 sets) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 1.4ton(2ea), 0.4ton(4ea) - Stroke: ±30mm - Optimal damping ratio: 10.0% ▪ Achieved damping ratio: 5.91% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
18	 <p>Hyundai-steel Stock House</p> <ul style="list-style-type: none"> ▪ Client: Hyundai Steel Co., Ltd. ▪ Outline - Long span slab - Frequency: 13.6~15.7Hz - Damping ratio: 0.3% ▪ Year: 2011 	 <ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (38 sets) ▪ Control direction: Vertical dir. ▪ Specification - Leaf spring & silicone damper - Moving Mass: 0.06ton (38 sets) - Stroke: ±25mm - Optimal damping ratio: 4.0~6.0% ▪ Achieved damping ratio: 2.51% ▪ Conceptual & Detailed Design / Manufacture / Installation / Performance test





No.	Project	Vibration Control Device
17	 <p>Yeoido Setgang Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Ilkyung E&C Co., Ltd. ▪ Outline - Cable stayed bridge - Length: 220m - Frequency: 0.94Hz(V), 1.11Hz(H) - Damping ratio: 0.6% ▪ Year: 2011 	 <ul style="list-style-type: none"> ▪ Type: Sliding & Cantilever Type TMD (4 sets) ▪ Control direction: Ver. & Horizontal ▪ Specification - Moving Mass: V.1.2ton(2ea), H.1.2ton(2ea) - Stroke: V :±70mm, H : 110mm - Optimal damping ratio: 2.0% ▪ Achieved damping ratio: 4.41%(V), 2.55%(H) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
16	 <p>Pylon of Geoga Bridge</p> <ul style="list-style-type: none"> ▪ Client: Deawoo E&C Co., Ltd. ▪ Outline - 3-pylon cable stayed bridge (Construction stage) - Height: 101.9m - Frequency: 0.22~0.28Hz - Damping Ratio: 0.5% ▪ Year: 2010 	 <ul style="list-style-type: none"> ▪ Type: TMD (3 sets) ▪ Control direction: Longitudinal dir. ▪ Specification - Pendulum type - Moving Mass: 24.0ton (3 sets) - Stroke: ±3000mm - Optimal damping ratio: 2.23% ▪ Achieved damping ratio: 5.38% ▪ Conceptual & Detailed Design / Manufacture / Installation / Performance test
15	 <p>POSCO E&C Head Office (A)</p> <ul style="list-style-type: none"> ▪ Client: POSCO E&C ▪ Outline - Height: 185m(39-stories) - Frequency: 0.26Hz(X), 0.24Hz(Y) - Damping ratio: 1.0% ▪ Year: 2010 	 <ul style="list-style-type: none"> ▪ Type: TMD (1 set) ▪ Control direction: Horizontal bi-dir. ▪ Specification - Moving Mass: 80.0ton - Stroke: ±300mm - Optimal damping ratio: 4.5%(X), 4.7%(Y) ▪ Achieved damping ratio: 4.58%(X), 8.49%(Y) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /

No.	Project	Vibration Control Device
14	 <p>POSCO E&C Head Office (B)</p> <ul style="list-style-type: none"> ▪ Client : POSCO E&C Co., Ltd. ▪ Outline - Height: 185m(39-stories) - Frequency: 0.25Hz(X), 0.24Hz(Y) - Damping ratio: 1.0% ▪ Year: 2010 	 <ul style="list-style-type: none"> ▪ Type: TMD (1 set) ▪ Control direction: Horizontal bi-dir. ▪ Specification - Moving Mass: 160.0ton - Stroke: ± 250mm - Optimal damping Ratio: 6.1%(X), 6.6%(Y) ▪ Achieved damping ratio: 3.60%(X), 4.94%(Y) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
13	 <p>Naksaeng Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Lotte E&C Co., Ltd. ▪ Outline - Cable stayed bridge - Length: 54m - Frequency: 1.52Hz(V) - Damping ratio: 0.6% ▪ Year: 2009 	 <ul style="list-style-type: none"> ▪ Type: TMD (2 sets) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 0.8ton (2 sets) - Stroke: ± 40mm - Optimal damping ratio: 4.7% ▪ Achieved damping ratio: 5.4% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
12	 <p>Alpensia Ski Jump Tower</p> <ul style="list-style-type: none"> ▪ Client : Taeyoung E&C Co., Ltd. ▪ Outline - Height: 115m - Frequency: 0.49Hz(X), 0.39Hz(Y) - Damping Ratio: 2.0% ▪ Year : 2009 	 <ul style="list-style-type: none"> ▪ Type : TMD (1 set) ▪ Control direction : Horizontal bi-dir. ▪ Specification - Moving Mass: 25.0ton(X), 23.0ton(Y) - Stroke: ± 250mm - Optimal damping Ratio: 5.6%(X), 5.4%(Y) ▪ Achieved damping ratio: 3.43%(X), 3.43%(Y) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /

No.	Project	Vibration Control Device
11	 <p>Namsan Cable Car</p> <ul style="list-style-type: none"> ▪ Client: Namsan Cable Car Way ▪ Outline <ul style="list-style-type: none"> - Cable Car - Weight: 5,600kg - Total length: 605m - Frequency: 0.16~0.27Hz - Damping ratio: 1.0% ▪ Year: 2009 	 <ul style="list-style-type: none"> ▪ Type: TMD (2 sets) ▪ Control direction: Transverse ▪ Specification (Pendulum Type) <ul style="list-style-type: none"> - Moving Mass: 170kg (2 sets) - Stroke: 700mm - Magnetic Damper - Optimal damping Ratio: 7.0% ▪ Achieved damping ratio: 6.564% ▪ Conceptual & Detailed Design / Manufacture / Installation / Performance test
10	 <p>Light Rail Transit, Japan</p> <ul style="list-style-type: none"> ▪ Client: IHI Corporation ▪ Outline <ul style="list-style-type: none"> - Light Rail Transit - Frequency: 8.0~10.0Hz - Damping ratio: 1.0%(approx.) ▪ Year: 2009 	 <ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (2 sets) ▪ Control direction: Vertical dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 40kg (2 sets) - Stroke: ±5.0mm - Optimal damping ratio: 7.0% ▪ Achieved damping ratio: 2.1% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
9	 <p>Cheonan Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Human Bridge ▪ Outline <ul style="list-style-type: none"> - Suspension bridge - Length: 63m - Frequency: 2.8Hz(V) - Damping ratio: 0.5% ▪ Year: 2008 	 <ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (2 sets) ▪ Control direction: Vertical dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 0.6ton (2 sets) - Stroke: ±50mm - Optimal damping Ratio: 5.0% ▪ Achieved damping ratio: 6.985% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /

No.	Project		Vibration Control Device	
8		<p>Ulsan Lotte Hotel</p> <ul style="list-style-type: none"> ▪ Client: IHI Corporation ▪ Outline - Hotel - Height: 110m (24-stories) - Frequency: 0.42Hz(X), 0.36Hz(Y) - Damping ratio: 1.0% ▪ Year: 2007 		<ul style="list-style-type: none"> ▪ Type : AMD (2 sets) ▪ Control direction : Horizontal bi-dir. ▪ Specification - Moving Mass: 20.0ton(X), 10.0ton(Y) - Stroke: ±600mm - Optimal damping Ratio: 20.6%(X), 13.9%(Y) ▪ Achieved damping ratio: 12.8%(X), 7.5%(Y) ▪ Conceptual & Detailed Design / Manufacture / Installation / Performance test
7		<p>Whaseong Dongtan Footbridge</p> <ul style="list-style-type: none"> ▪ Client: KR ▪ Outline - Nielsen arch bridge - Length: 87m - Frequency: 2.50Hz(V), 1.57Hz(H) - Damping ratio: 0.5% ▪ Year: 2006 		<ul style="list-style-type: none"> ▪ Type: TMD (6 sets) ▪ Control direction: Vertical & Horizontal ▪ Specification - Moving Mass: 0.6ton (Ver., 4 sets) 0.6ton (Hor., 2 sets) - Stroke: ±50mm - Optimal damping ratio: 5.0% ▪ Achieved damping ratio: 4.31%(V), 2.50%(H) ▪ Conceptual & Detailed Design / Manufacture / Installation / Performance test
6		<p>Eunpa Footbridge</p> <ul style="list-style-type: none"> ▪ Client: Human Bridge Co., Ltd. ▪ Outline - Suspension bridge - Length: 110m - Frequency: 1.77Hz - Damping ratio: 0.5% ▪ Year: 2006 		<ul style="list-style-type: none"> ▪ Type: Cantilever Type TMD (2 sets) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 0.65ton (2 sets) - Stroke: ±40mm - Optimal damping ratio: 5.0% ▪ Achieved damping ratio: 2.8% ▪ Conceptual & Detailed Design / Manufacture / Installation / Performance test /

No.	Project	Vibration Control Device
5	 <p>Busan Centumcity</p> <ul style="list-style-type: none"> ▪ Client: POSCO E&C Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Residence building - Weight: 33950ton - Height: 121.7m - Frequency: 0.52Hz(X), 0.47Hz(Y) - Damping ratio: 1.0% ▪ Year: 2004 	 <ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (3 sets) ▪ Control Dir: Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 100ton - Stroke: ±300mm ▪ Optimal damping ratio: 6.0% ▪ Achieved damping ratio: 4.15%(X), 3.90%(Y) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
4	 <p>2nd Jindo Bridge, Tower during Construction</p> <ul style="list-style-type: none"> ▪ Client: Hyundai E&C Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Construction stage - Cable stayed bridge - Height: 88.9m - Frequency: 0.576Hz - Damping ratio: 0.2% ▪ Year: 2003 	 <ul style="list-style-type: none"> ▪ Type: Sliding Block (2 sets) ▪ Control direction: Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 4.5ton (2 sets) - Stroke: ±385mm - Friction Coefficient : 0.3 ▪ Achieved damping ratio: 3.6% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test
3	 <p>2nd Jindo Bridge, Deck during Construction</p> <ul style="list-style-type: none"> ▪ Client: Hyundai E&C Co., Ltd. ▪ Outline <ul style="list-style-type: none"> - Construction stage - Cable stayed bridge - Length: 484m - Frequency: 0.19~1.0Hz - Damping ratio: 0.4% ▪ Year: 2003 	 <ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (2 sets) ▪ Control direction: Horizontal dir. ▪ Specification <ul style="list-style-type: none"> - Moving Mass: 12.0ton (2 sets) - Stroke: ±1000mm - Optimal damping Ratio: 6.0% ▪ Achieved damping ratio: 5.55% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test

No.	Project	Vibration Control Device
2	 <p>Yangyang Airport</p> <ul style="list-style-type: none"> ▪ Client: KAC(Korea Airport Corporation) ▪ Outline - Steel & concrete - Height: 80.1m - Frequency: 0.386 - Damping Ratio: 1.0% ▪ Year: 2001 	 <ul style="list-style-type: none"> ▪ Type : Sliding TMD (1 set) ▪ Control direction : Horizontal 1 way ▪ Specification - Moving Mass: 15ton - Stroke: ±300mm - Optimal damping ratio: 6.8%(x) ▪ Achieved damping ratio: 4.5%(x) ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /
1	 <p>Rima Building</p> <ul style="list-style-type: none"> ▪ Client: Rima Co., Ltd. ▪ Outline - Slab vibration due to traffic load - Frequency: 10.5Hz(Z) - Damping ratio: 2.0% ▪ Year: 2001 	 <ul style="list-style-type: none"> ▪ Type: Sliding Type TMD (1 set) ▪ Control direction: Vertical dir. ▪ Specification - Moving Mass: 200kg - Stroke: ±50mm - Optimal damping Ratio: 4.0% ▪ Achieved damping ratio: 3.2% ▪ Conceptual & Detailed Design / / Manufacture / Installation / / Performance test /